

R.F. PATHS

Frequency: 15.0 to 22.0 GHz
 VSWR: 1.15:1 Max.
 Insertion Loss: 0.15 dB Max.
 Isolation: 60 dB Min.

Flange: See Flange Table
 Voltage: See Voltage Table
 Switching Time: 80 mS Max.

Material: Aluminum (RF Assy)
 Finish: Iridite per MIL-C-5541
 Paint Dull Black Enamel
 30 PSIG (RF Head Only)
 Drive: Patented Logus I Motor


Temp: Operating: -40°C to +85°C
 Non-Operating: -55°C to +100°C

Humidity: 0 to 100%, Fully Weatherized

DRIVE OPTIONS
LATCHING
PULSE LATCHING
FAILSAFE
TTL

VOLTAGE OPTIONS
12 VDC
15 VDC
24 VDC
28 VDC
48 VDC
115 VAC
230 VAC

FLANGE OPTIONS
COVER
GROOVE
CHOKE

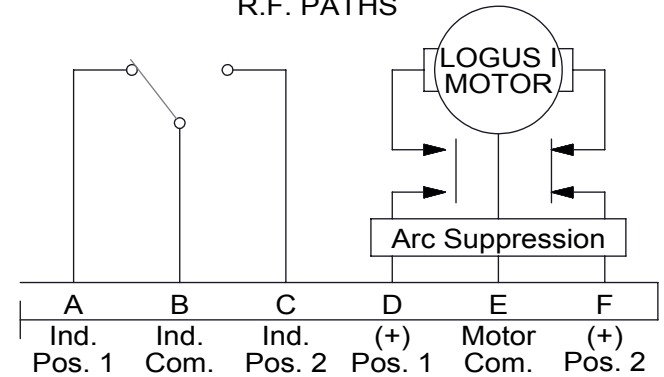

LATCHING, SHOWN IN POSITION 1

(other circuits available)

RoHS Available