



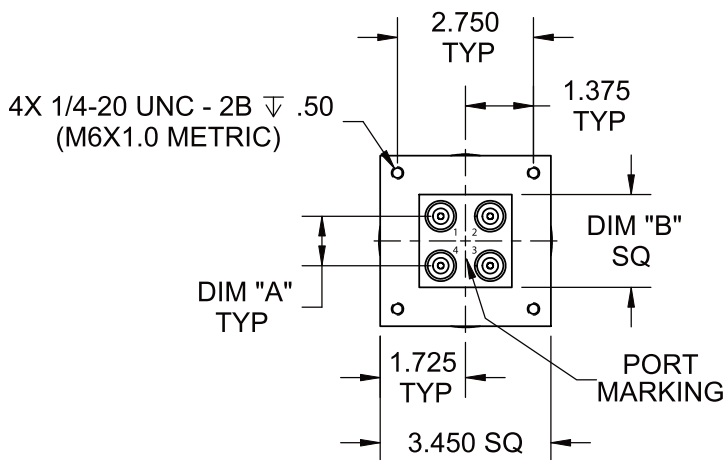


Logus Satellite Communications Division

1305 Hill Ave., West Palm Beach, FL 33407 USA | tel: 561-842-3550 | fax: 561-842-2196 | www.LogusSat.com

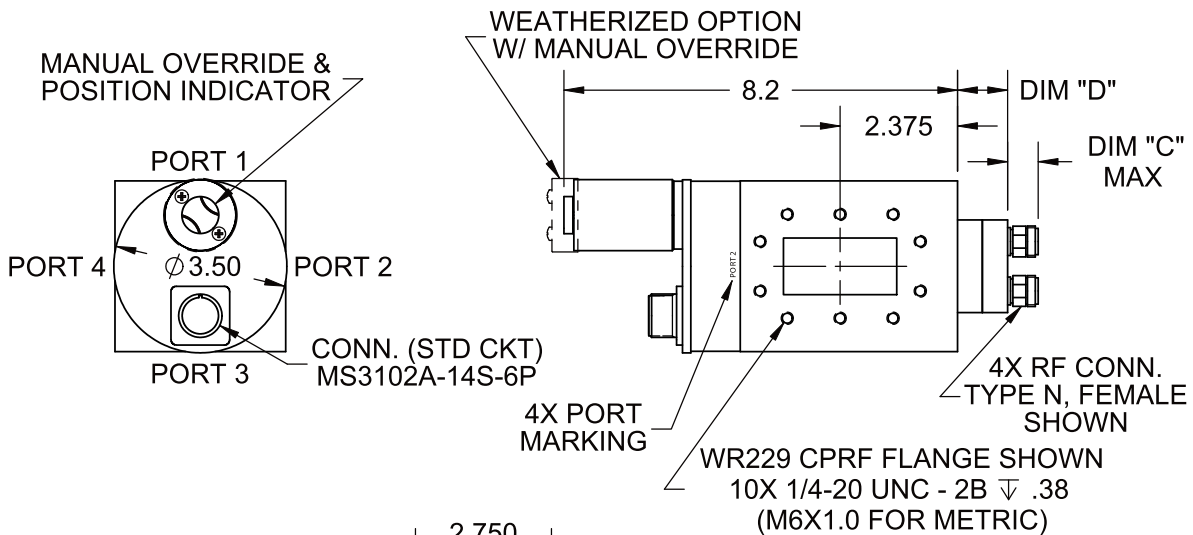


Platinum Replacement Dual WR229 - Series Brand "S"

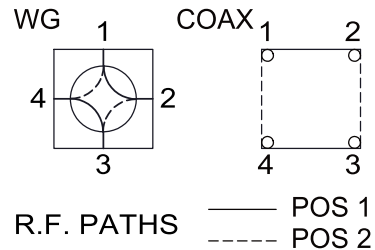

Dimensions	DIM "A"	DIM "B"	DIM "C"	DIM "D"
Type "N"	1.000	2.00	.65	1.01
SMA	.820	1.60	.31	.74
BNC & TNC	.820	1.60	.65	.74

Specifications	W/G	COAX
Frequency:	3.60 to 4.25 GHz	
VSWR:	1.05:1 Max.	1.25:1 Max.
Insertion Loss:	0.02 dB Max.	0.25 dB Max.
Isolation:	80 dB Min.	60 dB Max.
Switching Time:	100 mS Max.	
Pressure:	30 PSIG (RF Head)	
Life:	200,000 Cycles Min.	
Finish:	Black Iridite	

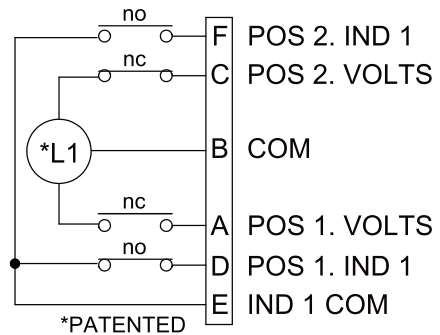

STD. ELECTRICAL CKT.
Shown in Position 1
ONE FORM C